

THREE PHASE, THREE STAGE DESIGN TYPE: MF 423-3-3D

CSA/UL/NEMKO APPROVAL SHORTLY

- * 3 phase filter for drives/invertors
- * High performance
- * 1-100A Current Rating



Part No.	Current Rating	Case	Termination
MF 423-3-3D-10	10A	X1	Shock Proof Connector
MF 423-3-3D-15	15A	X1	-do-
MF 423-3-3D-20	20A	X2	-do-
MF 423-3-3D-40	40A	X2	-do-
MF 423-3-3D-60	60A	X2	-do-
MF 423-3-3D-80	80A	X3	-do-
MF 423-3-3D-100	100A	X3	-do-


SPECIFICATIONS

Voltage Rating	500VAC 50/60 Hz
Current Rating	10 to 100 Amps
Current Overload	6x Rated current for 8 Seconds


High Potential Testing (1 minute)

Line to Ground	2759VDC
Line to Line	2089VDC
Temperature Range	-25° to 85°C

CIRCUIT DIAGRAM

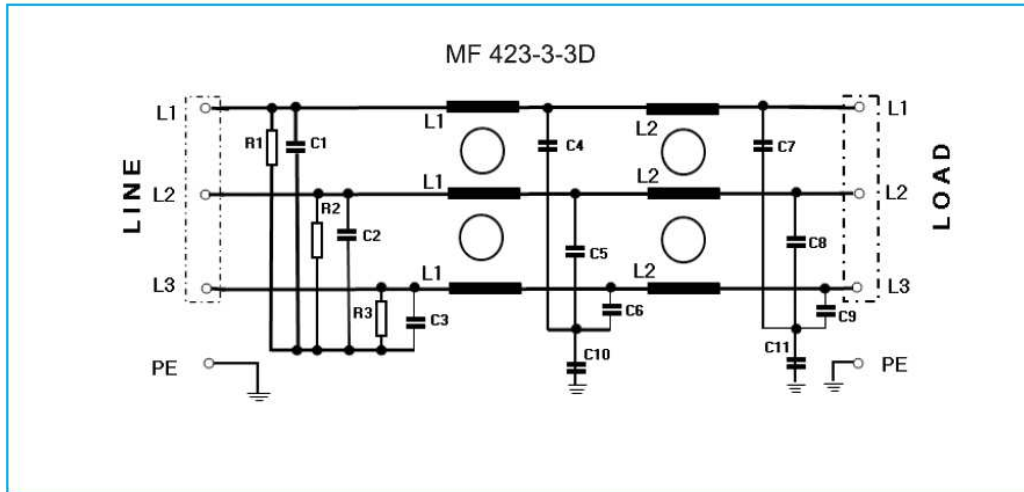

MECHANICAL DRAWING

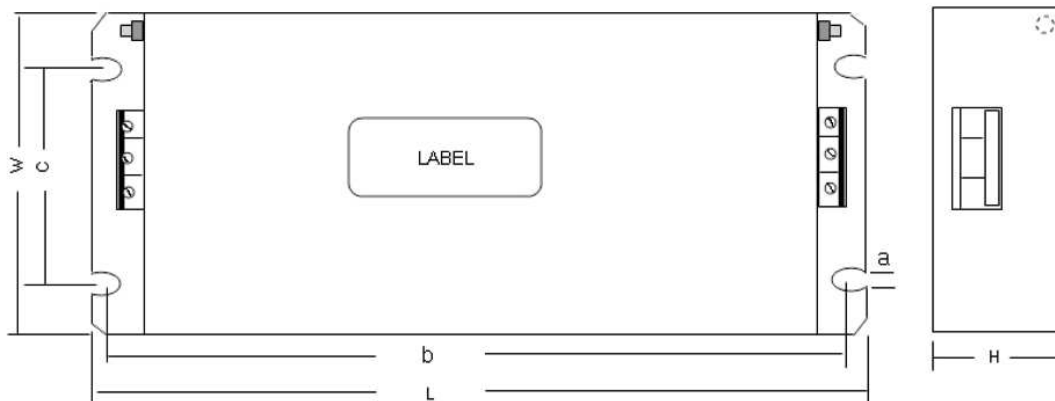

DIMENSIONS	x1	x2	x3
L	250	270	350
W	110	140	180
H	60	60	90
a	6	6	8
b	237	257	335
c	76	106	145